




QWARTZ ULTRA SLIM 3.0

FINE PITCH - MODULAR INDOOR LED SCREEN



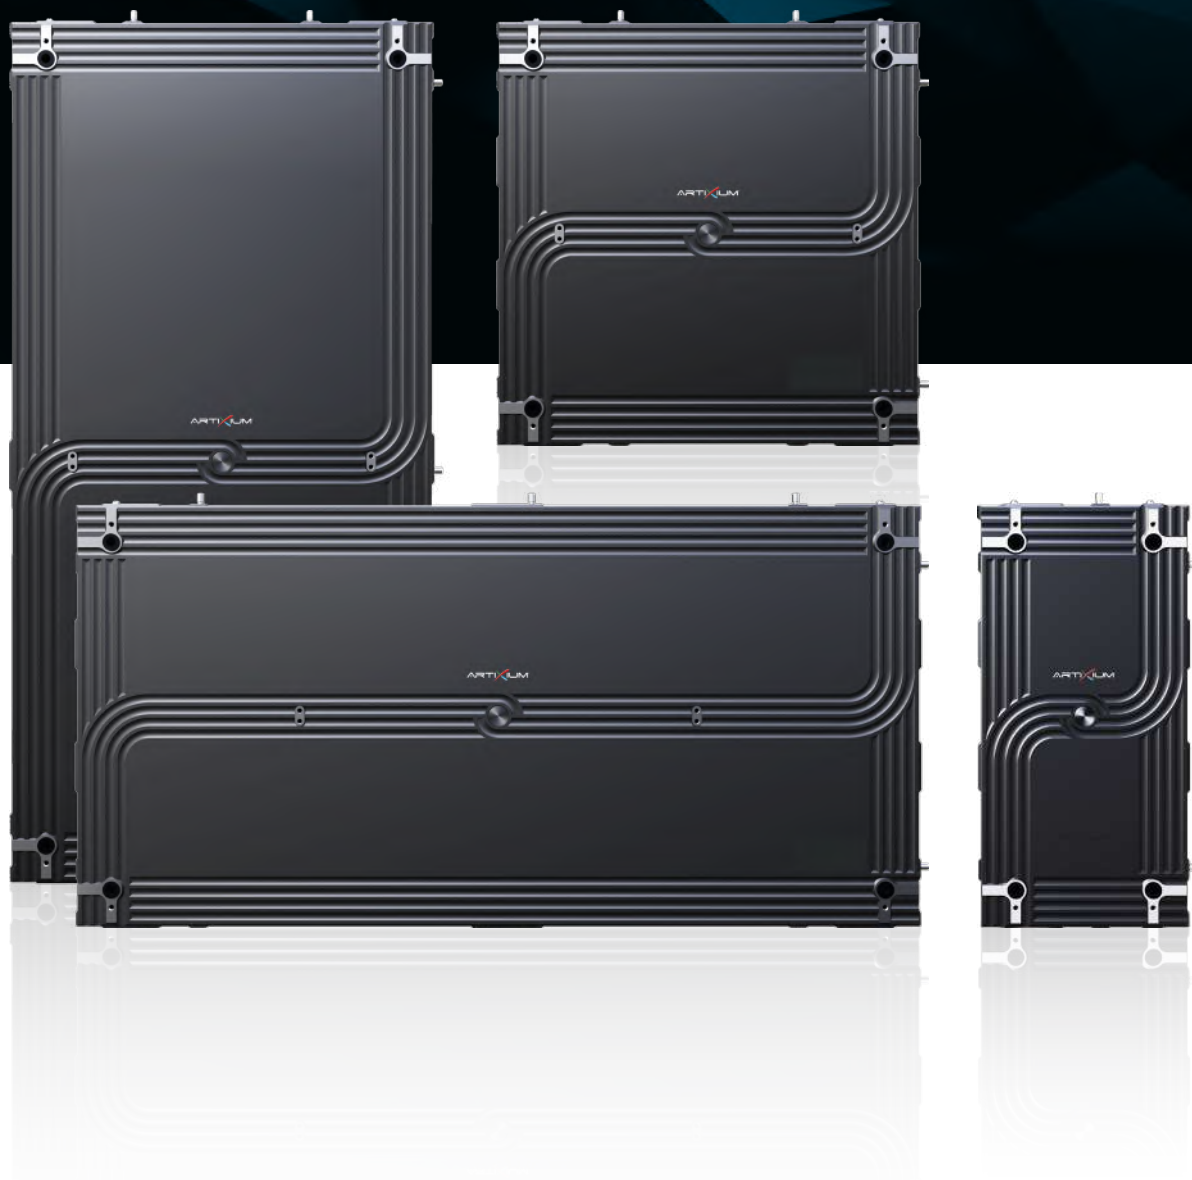

OVERVIEW

This LED cabinet is the latest addition to our QWARTZ ULTRA SLIM range. The QWARTZ ULTRA SLIM 3.0 works on a 250 x 250 mm modular basis, making it ideal for many indoor LED application projects. Although similar to the QWARTZ ULTRA SLIM 2.0 regarding its design, it differs from it with its dimensions, thought to maximize modularity and adaptability rather than seeking a 16:9 ratio.



APPLICATION
Indoor



INGRESS PROTECTION
IP20



PIXEL PITCH
P1.9 P2.6



DISPLAY AREA (W x H)
1000 x 500 mm
750 x 500 mm
500 x 500 mm
250 x 500 mm
500 x 1000 mm



BRIGHTNESS
≤ 1000 NITS @5volts



WEIGHT
18.5 - 18 kg/m²



MATERIAL
Die-casting aluminum




MAINTENANCE
Front maintenance




FEATURES

The QWARTZ ULTRA SLIM 3.0 is available in 5 different sizes, all of them compatible with one another. Below is

the 500 x 500 mm cabinet, but the presented features remain the same on the other cabinets.

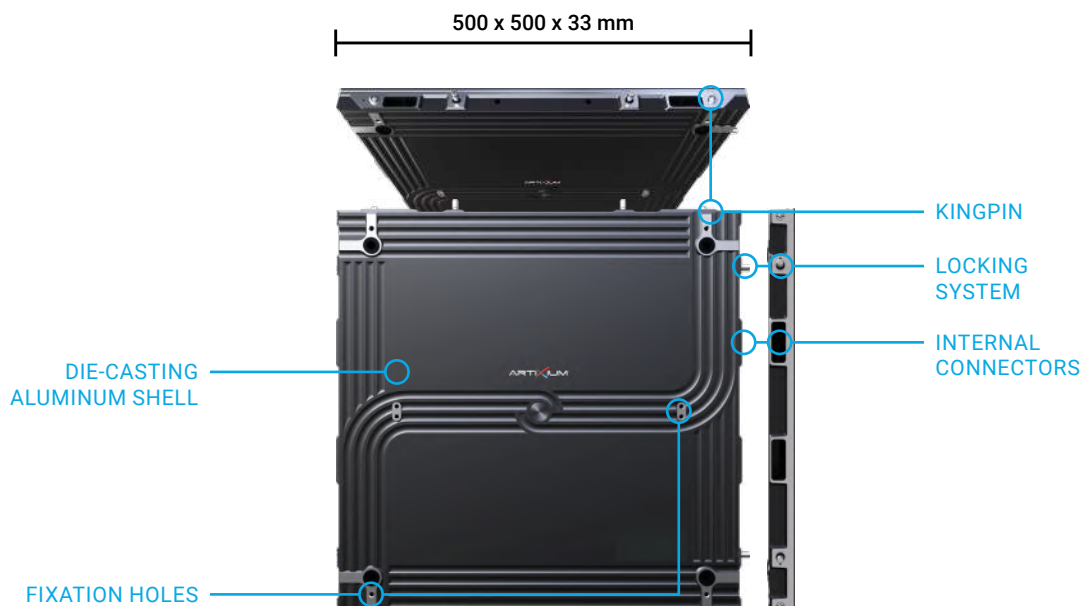

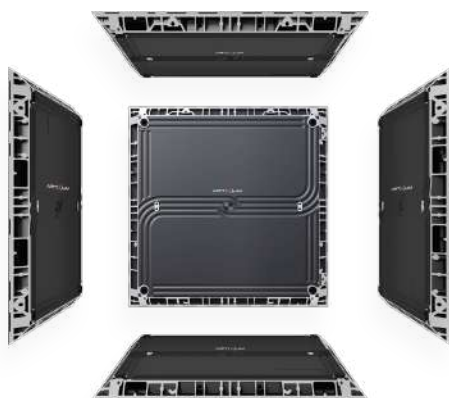


90° ANGLES

The QWARTZ ULTRA SLIM cabinets can be bevelled at a 45° angle on the edges to allow 90° applications. You can even obtain seamless LED cubes with cabinets bevelled on all edges. This feature allows high creativity to your giant LED screen projects.



ULTRA SLIM FRONT
MAINTENANCE CABINET



MAGNETIC FRONT
ACCESS MODULES



90° OPTION

FINE PIXEL PITCH

With a fine P1.9 or P2.6 pixel pitch, and SMD black face LEDs, the QWARTZ ULTRA SLIM 3.0 is slightly above what we consider to be ultra HD LED cabinets, pitch-wise. This product is capable of displaying very high-quality content, even allowing a 1920 x 1080 pixels resolution with a limited number of cabinets. No matter the number and layout of your LED cabinets, you'll get an astonishing render on your giant indoor screen.



MODULAR LED SOLUTION

With its 5 different compatible cabinet sizes, the QWARTZ ULTRA SLIM 3.0 allows you to create tailored giant LED screens while optimizing the number of receiving cards, making your application as cost-effective as possible.





TECHNICAL SPECIFICATIONS




		INDOOR	
Product Parameters	Unit	1.9	2.6
Pixel Pitch	mm	1,95	2,60
LED		SMD1212 3in1	SMD1515 3in1
Application		Indoor modulare LED screen	
Ingress Protection	IP	IP20	
Brightness	cd/m²	≤ 1000 Nits @5volts	
Color Temperature after calib (adjustable)	deg. K	6500	
Viewing Angle (50% brightness)	deg.	160 H / 160 V	
Cabinet Size (WxHxD)	mm	500 x 1000 x 34.9 / 1000 x 500 x 34.9 / 750 x 500 x 34.9 / 500 x 500 x 34.9 / 250 x 500 x 34.9	
Display area (WxH)	mm	500 x 1000 / 1000 x 500 / 750 x 500 / 500 x 500 / 250 x 500	
Module Size (WxHxD)	mm	250 x 250 x 3	
Pixel Matrix Per Cabinet (WxH)	px	256 x 512 / 512 x 256 / 384 x 256 / 256 x 256 / 128 x 256	192 x 384 / 384 x 192 / 288 x 192 / 192 x 192 / 96 x 192
Pixel Matrix Per Module (WxH)	px	128 x 128	96 x 96
Pixel Density	px/m²	262144	147456
Weight of cabinet	kg	18.5	18
Cabinet Material		Die-casting aluminum	
Maintenance Mode		Front	
Mask specification		95% Plastic + 5% Fiber / Clips (no screws) / No shaders	
Contrast Ratio		High	
Grey scale (linear)	bit	16	
Brightness control	bit	16	
Processing depth	bit	16	
Color		281 Trillions	
Display Refresh Rate	Hz	3840	
Operation Power	V	AC85-230V	
Max. Power Consumption	W/m²	420	
Average Power Consumption	W/m²	160	
Control Mode		Synchronous / Asynchronous	
Video Frame Rate	Hz	50/60Hz	
Input Types Supported		DVI / SDI / HDMI	
3D ready (optional)		Yes	
Calibration		Yes	
Lifetime (50% brightness)	h	50000	
Operating Humidity Range		10-95%	
Operating Temperature Range		-30°C / +60°C	
Screen Uniformity Correction		Yes	
Certification		CE / EMC / LVD / FCC / ETL	
Available options		90° angles	
Compatibility		All cabinet sizes are compatible with one another / A cabinet can be installed vertically or horizontally	




TECHNICAL DRAWINGS


500 X 1000 X 34.9 MM

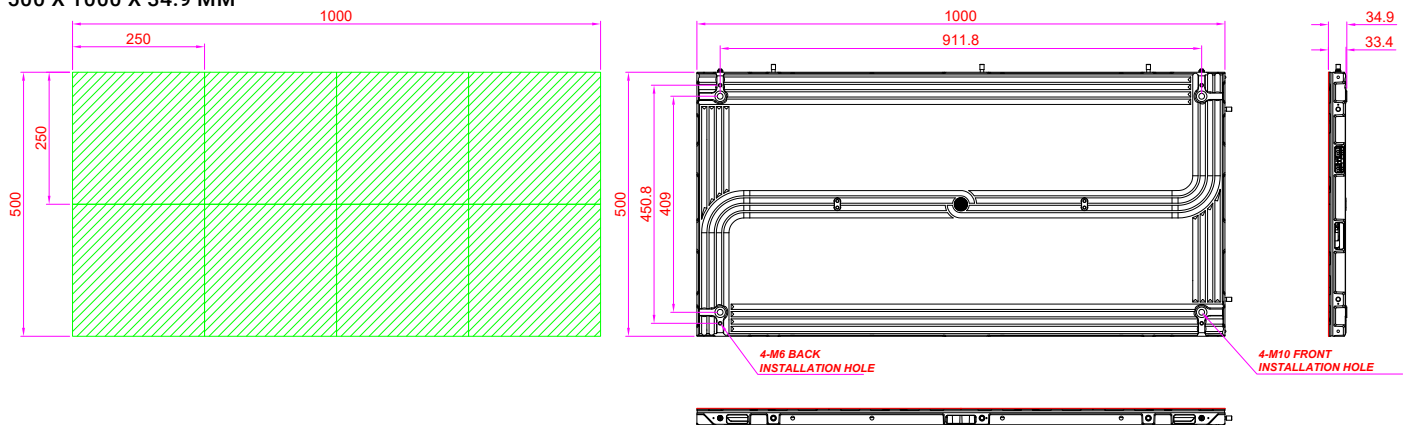

500 X 500 X 34.9 MM

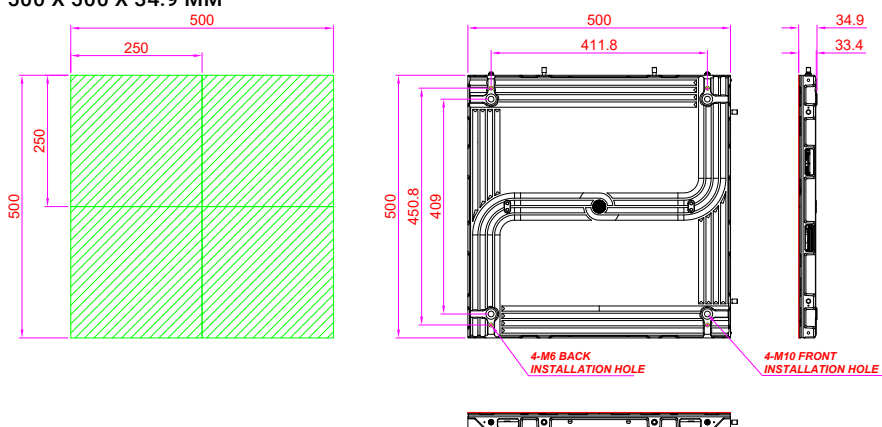

250 X 500 X 34.9 MM

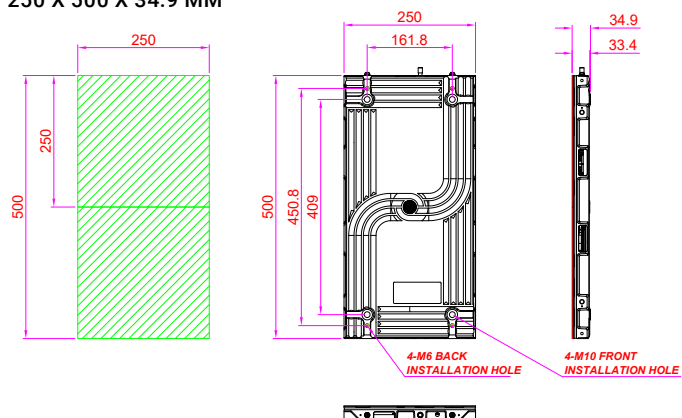

CONTACT


The Artixium regional branches are the key for the growth and development of our global network all over the world. Artixium's team is a spectrum of different nationalities and cultures, reflecting their global presence and mindset, mak-

ing their communication smooth and hassle-free with clients from all around the world. Customer care, Innovation and flexibility has always been our values and we intend to keep this reputation for many years to come.


ARTIXIUM FRANCHISES

"From your project's conception to its completion."




 112 Avenue Franklin Roosevelt
69120 Vaulx-en-Velin
France




 Artixium Operational Center
518000 Shenzhen
China




 Weissensteinstrasse 90b,
46149 Oberhausen
Germany



 Merkez Mah. Baglar Cad. A
Blok Apt. No: 14D/13 Kagithane, Istanbul
Turkey




 www.artixium.com

 0 428 001 801

 [linkedin.com/company/artixium](https://www.linkedin.com/company/artixium)

 twitter.com/artixium

 contact@artixium.com

 [youtube.com/@artixium](https://www.youtube.com/@artixium)

 [facebook.com/artixium](https://www.facebook.com/artixium)

 [instagram.com/artixium](https://www.instagram.com/artixium)



Since its creation in 2012 by two european entrepreneurs, Artixium has been evolving and always looking for innovative ways to contribute to the digital transition of our world. It only took a few years for Artixium to become a key player in the LED display industry.

www.artixium.com